


μ -ROC

OEM Femtosecond Autocorrelator

ROC stands for Row Optical Correlator. Based on an ultra compact and robust inline setup, the μ -ROC takes the ROC concepts to its limit for the measurement of single-shot autocorrelation traces in the smallest housing footprint ever. Based on the most advanced innovation from Femto Easy, leveraging several years of experience in the single-shot ultrafast instrumentation, the μ -ROC is specifically designed for OEM direct integration into laser heads or laser systems.

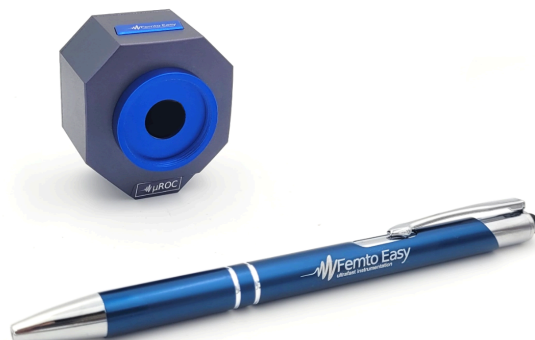

Key features

- ◆ Ultra compact and easy to align
- ◆ Robust design, no moving parts. Non sensitive to vibrations
- ◆ Directly powered by the USB cable, no power supply required
- ◆ Suitable for any repetition rate. Single-pulse extraction possible up to 100 kHz laser repetition rate (with Trigger option)
- ◆ User-friendly and powerful software. REST API for standard software integration using simple HTTP requests

Options


- ◆ Trigger
- ◆ Enhanced detection

Specifications

| μ-ROC Models | | Ti:Sa | Ti:Sa-S | Yb | Yb-S | Er | Er-S |
|---|-----|---|----------------------|-----------------------|----------------------|-----------------------|----------------------|
| Pulse duration range (fs) | min | 35 - 75 ¹ | 10 - 50 ¹ | 50 - 150 ¹ | 20 - 50 ¹ | 50 - 150 ¹ | 20 - 50 ¹ |
| | max | 1200 | 500 | 1500 | 1000 | 1500 | 1000 |
| Accessible spectral range (nm) | | 780 - 820 | 760 - 850 | 1020 - 1080 | 960 - 1100 | 1400 - 1600 | 1300 - 1700 |
| Input pulse repetition rate | | any | | | | | |
| Single-pulse measurement | | up to 100 kHz laser repetition rate (with Trigger option, 50 kHz without) | | | | | |
| Min input average power ² | | 20 mW | 35 mW | 5 mW | | 10 mW | |
| Min input pulse energy ² | | 1 nJ | 3 nJ | 1 nJ | | 3 nJ | |
| Min input pulse energy (single-shot) ² | | 25 μJ | 50 μJ | 1 μJ | | 3 μJ | |
| Input polarization | | linear horizontal or vertical | | | | | |
| Detection | | CMOS 12 bits | | | | | |
| PC Interface | | USB 3.1 | | | | | |
| Beam height (mm) | | 20 | | | | | |
| Dimensions (mm) | | 30 x 40 x 45 | | | | | |

¹ The two minimum pulse duration values correspond to the Fourier limited pulse duration with and without GDD precompensation.

² Values give an order of magnitude, exact sensitivity depends on parameters such as pulse duration, repetition rate, beam diameter, wavelength...

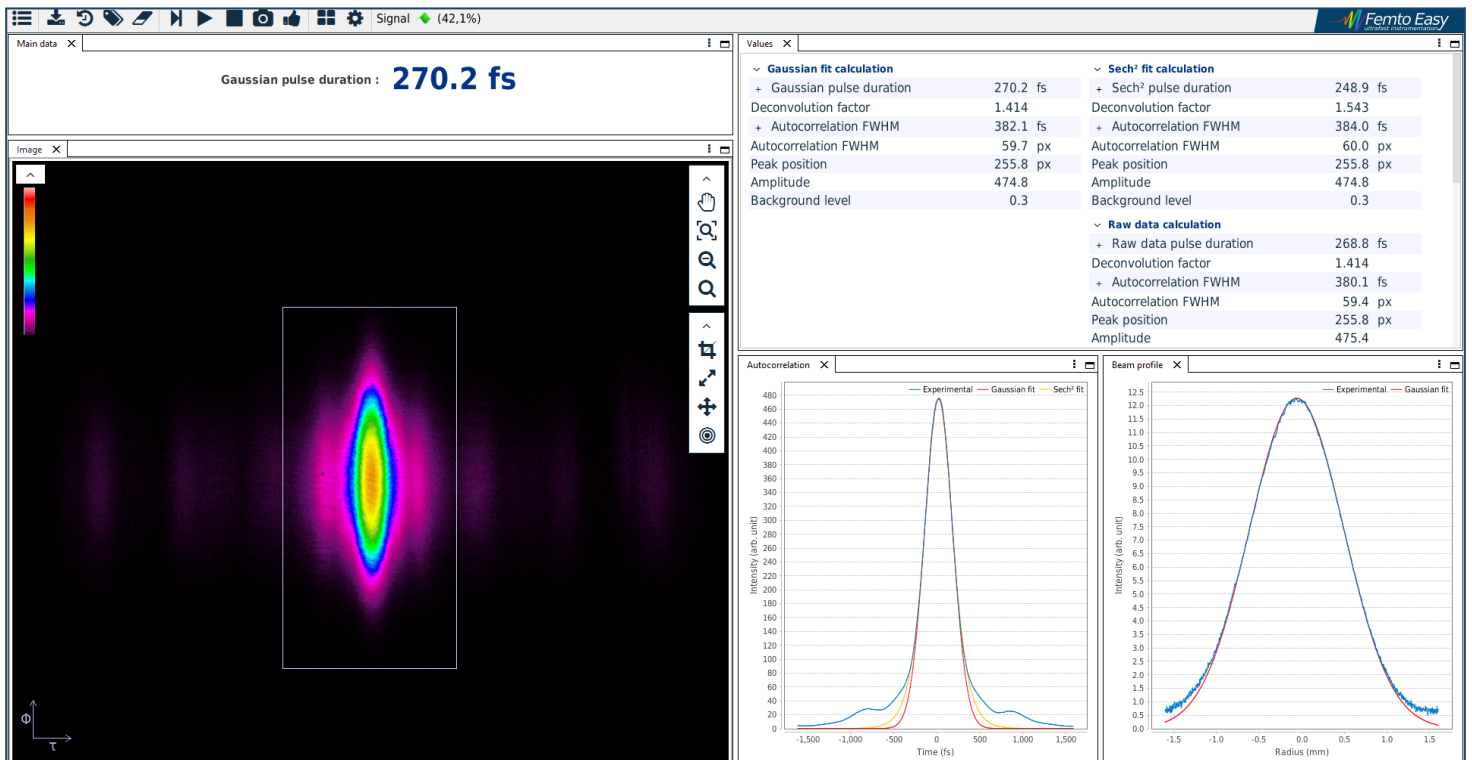

- ◆ Live extraction of shot to shot pulse duration
- ◆ Different calculation methods available for proper pulse estimation (Raw data FWHM, Gaussian fit, sech2...)
- ◆ Enhanced background & hot pixels treatment, for optimum dynamic and signal to noise ratio
- ◆ Client / Server interface, and REST API for the easiest integration
- ◆ All data exportable into most common formats